

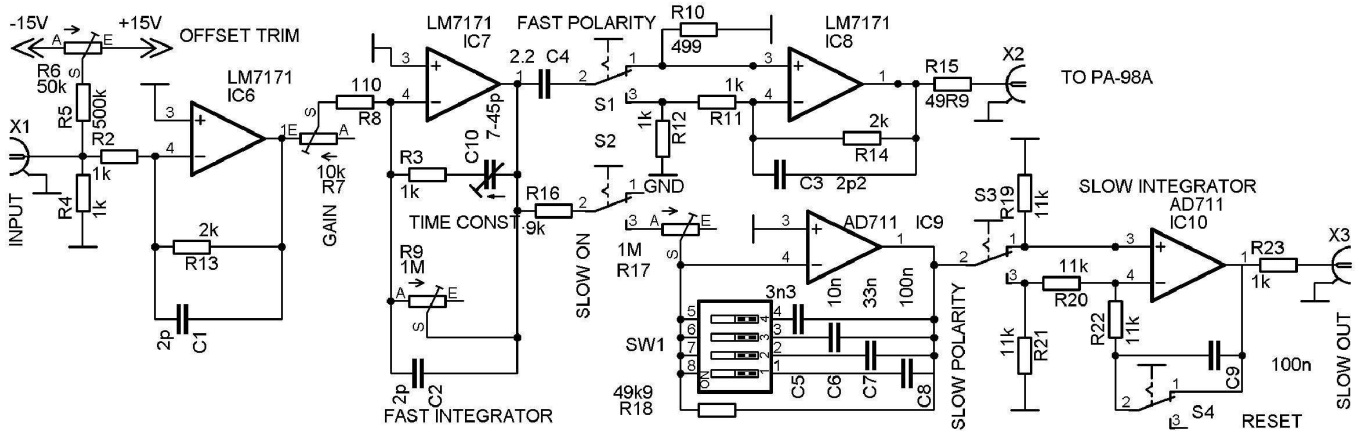


FIG. 3: Schematic of the slow and intermediate-speed PI controllers.

each Ti:sapphire laser using a residual reflection from a common optical element. A total of 2 mW reaches the beat detector (Fig. 1). The beatnote is amplified and a double-balanced mixer (DBM) serves as a phase detector, with the local oscillator (LO) input driven by an Agilent E8241A synthesizer at ~ 168 MHz. In order to prevent laser amplitude fluctuations from coupling into the phase noise measurement, a 50 MHz high-pass filter is placed before the phase detector.

The feedback to the slave laser consists of three paths: a slow, an intermediate-speed, and a fast path (Fig. 2). The slow feedback path has a proportional-integral (PI) control with a bandwidth of 20 kHz. It controls the length of the laser's resonant cavity through the modified control box, which modulates a piezo-actuated mirror as well as etalons in the cavity. The fast and the intermediate-speed feedback paths feed to opposite electrodes of the intracavity EOM. The intermediate-speed path uses a PI controller and a high-voltage operational amplifier (Apex PA98A, with a high slew rate of $1000\text{ V}/\mu\text{s}$ and $\pm 150\text{ V}$ swing) for driving the EOM, which provides a frequency tuning coefficient of 0.2 MHz/V . The bandwidth of this path is limited to 0.8 MHz by PA98A. The fast feedback path consists of a passive proportional-differential (PD) controller followed by an RF power amplifier (Fig. 2). After this RF amplifier, a directional coupler is inserted before connecting to an electrode of the EOM to ground the electrode for DC voltages. The differential control in the fast path compensates for phase lag due to propagation delay at high frequencies. We achieve an overall closed-loop bandwidth of $\sim 10\text{ MHz}$, limited by the propagation delay in the optical and electronic signal path lengths.

We study the performance of the phase-locked lasers using a separate beat detector after passing both beams through one single-mode polarization-maintaining fiber with the same polarization, for an out-of-loop measurement. Figure 4 (solid line) shows the phase noise spectral density. The wideband (> 100 kHz) noise, which goes

down to -138dBc/Hz, is measured with an HP 8590B spectrum analyzer, and the low-frequency noise is measured with a SRS SR785 FFT signal analyzer by down-converting the beat signal to DC with a separate DBM but using the same LO as that in the PLL (This is found necessary, as otherwise the measurement is limited by the noise of LO.) The peaks at 9 MHz indicate the loop bandwidth. The residual phase variance integrated over a frequency range from 1 Hz to 10 kHz is about 10^{-6} rad² (solid line).

For comparison, we also measure the phase noise with a digital phase detector (Analog Devices AD9901) instead of a DBM (Fig. 4). The ~ 8 dB increase of the wide-band phase noise probably arises from the conversion of the analog waveforms into digital signals, where voltage noise in the analog signal causes phase noise as it makes uncertain the time of zero-crossings.

The frequency agility is illustrated by stepping the LO frequency. We find that with the DBM, phase-lock without cycle slips is maintained for sudden phase-continuous frequency changes as large as 4 MHz. This 4 MHz frequency step is limited by the ~ 20 Vp dynamic range of the fast feedback path. The transient behavior of the PLL is examined by adding a square wave signal to the output of the DBM. The slave laser settles to 20% within 200 ns after each step.

The rise of phase noise at low frequencies (solid line in Fig. 4) is mainly due to laser pointing fluctuations, air flow, and optics vibration. This noise is not revealed in an electronically out-of-loop measurement (-110 dBc/Hz at low frequencies, gray line in Fig. 4) using the same photodetector but a separate mixer (Mixer2 in Fig. 2). (The best performance in this measurement is achieved by replacing the 17dBm types ZFM-1H by 27dBm types VAY-1, both by mini-circuits.) Although this electronically out-of-loop performance is similar to the one reached by Ye and Hall [8], an atom interferometer still suffers the much higher noise.

This is because the two beams must be sent to the

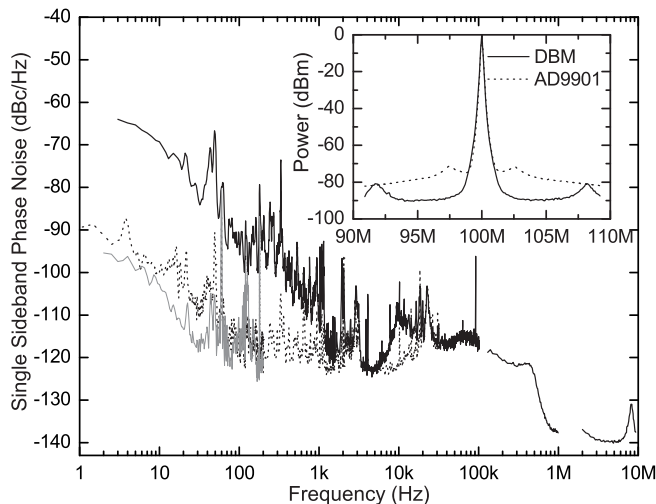


FIG. 4: Residual phase noise with an analog phase detector (measured out of loop). Solid line: phase lock before fiber only; dashed line: phase lock after fiber; gray line: electronic out-of-loop phase noise measured with Mixer2 in Fig. 2. The gaps at 100 kHz and 1 MHz are due to different range settings between data sets. Inset: phase noise spectra of analog and digital phase detectors. Resolution bandwidth: 100 kHz.

atoms via separate paths in a counter-propagating geometry. Differential vibrational noise in these paths would essentially increase the noise to the level of the solid line in Fig. 4, even if the noise is suppressed to a lower level at one point in the setup.

We can avoid this and thus employ the ultra-low phase noise of the lasers by having two simultaneous interferometers in an arrangement shown in Fig. 1. Four frequencies $f_1 \dots f_4$ are generated from the two phase-locked Ti:Sapphire lasers using an acousto-optic modulator. Using atoms in different (internal and/or external) states, the individual interferometers are addressed by the beam pairs with the frequencies $\{f_1, f_4\}$ and $\{f_2, f_3\}$, respectively. In many cases, e.g., the photon recoil measurements [11] and the gravity gradient measurements [12], the interesting physics is revealed in the difference of the interferometer phases, which are proportional to

the frequency differences $f_1 - f_4$ and $f_2 - f_3$. For effective noise reduction, we take the beatnotes of overlapped beams at $f_1 - f_2$ and $f_3 - f_4$, and phase-lock their sum $(f_1 - f_2) + (f_3 - f_4)$ by a secondary PLL, which is added to the main PLL by shifting the LO phase. This, however, is the frequency containing the information, $(f_1 - f_4) - (f_2 - f_3)$; thus, the laser frequencies are generated such that the differential phase is directly stabilized.

Noise from vibrational variations of the optical path lengths $\delta l_u, \delta l_d$ from the beat detectors to the atoms for the upper and lower beams (Fig. 1) is effectively cancelled: In the individual paths, it causes optical phase changes of $2\pi\delta l_u \frac{f_{1,2}}{c}, 2\pi\delta l_d \frac{f_{3,4}}{c}$, which results in phase shifts in the individual atom interferometers proportional to $2\pi(\delta l_u \frac{f_1}{c} - \delta l_d \frac{f_4}{c})$ and $2\pi(\delta l_u \frac{f_2}{c} - \delta l_d \frac{f_3}{c})$. The difference of the readout phases of the simultaneous interferometers is then proportional to $2\pi(\delta l_u \frac{f_1 - f_2}{c} - \delta l_d \frac{f_4 - f_3}{c})$. Since the wavelengths of the beatnote frequencies $\lambda_{ij} = \frac{c}{f_i - f_j}$ is large compared to the amplitude of vibrations $\delta l_u, \delta l_d$, the common-mode noise is strongly suppressed. We operate such a secondary PLL for the differential phase (Fig. 1), and measure the residual noise in the differential phase using another beat detector at a different point in the optical path. As a result, the noise (dashed line in Fig. 4) is reduced to $2.5 \times 10^{-8} \text{ rad}^2$, which is servo gain limited.

In summary, we have demonstrated phase-locked 1.6 W Ti:sapphire lasers with an ultra-low phase noise of -138 dBc/Hz at 1 MHz offset, capable of making instantaneous difference frequency steps of up to 4 MHz in 200 ns without cycle slips. We have described the use of this laser system for simultaneous atom interferometers such that the readout of the differential phase of the interferometers can make use of this low noise, rejecting noise from optics vibrations. The will be used to perform atom interferometry for photon-recoil measurements using Cs atoms with part-per-billion accuracy.

We would like to thank Chris Vo for discussions. H. M. acknowledges the support from the Alexander von Humboldt Foundation. This work is sponsored in part by grants from the AFOSR, the NSF and the MURI.

-
- [1] Th. Udem, R. Holzwarth, and T. W. Hänsch, *Nature* (London) **416**, 233 (2002).
 - [2] G. Wilpers, T. Binnewies, C. Degenhardt, U. Sterr, J. Helmcke, and F. Riehle, *Phys. Rev. Lett.* **89**, 230801 (2002).
 - [3] H. Müller, S. Herrmann, C. Braxmaier, S. Schiller, and A. Peters, *Phys. Rev. Lett.* **91**, 020401 (2003).
 - [4] R. K. Shelton, L. S. Ma, H. C. Kapteyn, M. M. Murnane, J. L. Hall, and J. Ye, *Science* **293**, 1286 (2001).
 - [5] S. Chu, *Nature* (London) **416**, 206 (2002).
 - [6] Y. Brenton, M. Kasevich, and S. Chu, in *Atom Interferometry*, edited by P. R. Berman (Academic Press, San Diego, 1997), pp. 363-406.
 - [7] P. Bouyer, T. L. Gustavson, K. G. Haritos, and M. A. Kasevich, *Opt. Lett.* **21**, 1502 (1996).
 - [8] J. Ye and J. L. Hall, *Opt. Lett.* **24**, 1838 (1999).
 - [9] S. Gupta, K. Dieckmann, Z. Hadzibabic, and D. E. Pritchard, *Phys. Rev. Lett.* **89**, 140401 (2002).
 - [10] D. Haubrich and R. Wynands, *Opt. Commun.* **123**, 558 (1996).
 - [11] A. Wicht, J. M. Hensley, E. Sarajlic, and S. Chu, *Phys. Scr.* **T102**, 82 (2002).
 - [12] G. T. Foster, J. B. Fixler, J. M. McGuirk, and M. A. Kasevich, *Opt. Lett.* **27**, 951 (2002).